

September 30, 2020

ADDENDUM #1

NOTICE TO ALL BIDDERS FOR CITY OF WINCHESTER

ITB #202004 – PENNSYLVANIA AVENUE AND CONWAY WASTEWATER PUMP STATIONS REPLACEMENT

This Addendum forms a part of the Contract Documents and modifies the original bidding documents for ITB #202004 Reissue dated September 2020. *Bidders shall acknowledge receipt of the Addendum in the space provided on the Bid Form and return a signed copy with your bid.*

This Addendum must be signed and returned to the Finance Department – Purchasing Division, 1st Floor Rouss City Hall, 15 North Cameron Street, Winchester, VA 22601 by **2:00pm local time on October 29, 2020** with your BID.


Receipt of Addendum #1 to Invitation to Bid #202004 is acknowledged by my signature below:

Company Name: _____

Authorized Representative: _____

Address: _____

Telephone: _____ FAX: _____

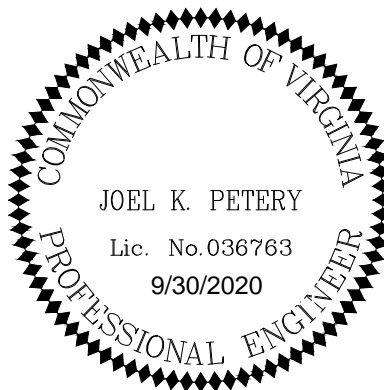

This Addendum consists of 3 total pages. The following information shall modify and clarify the Contract Documents:

CHANGES TO TABLE OF CONTENTS

1. [Not USED]

CHANGES TO BID FORM

1. [NOT USED]

CHANGES TO THE CONTRACT

1. [NOT USED]

CHANGES TO THE SPECIFICATIONS

1. [NOT USED]

CHANGES TO THE DRAWINGS

1. Drawing C3-P **Delete** callout reading "CONC PAD FFE: 727.00 0331607R" in its entirety and **Add**
"CONC FOUNDATION, FFE 727.00, SEE DWG S1-P"
2. Drawing C3-P **Delete** callout reading "EMERGENCY GENERATOR WITH SUBBASE FUEL TANK FFE: 727.00 SEE NOTE 1" in its entirety and **Add**

"EMERGENCY GENERATOR WITH SUBBASE FUEL TANK, FFE: 727.00 SEE NOTE 4"

3. Drawing C3-P **Delete** Note 4 in its entirety and **Add**

"PROVIDE AN ALUMINUM GENERATOR ACCESS PLATFORM COMPLETE WITH ACCESS LADDERS AND HANDRAILS FROM CONCRETE EQUIPMENT PAD TO THE GENERATOR MAINTENANCE DOORS, SEE GENERATOR NOTES AND DETAILS ON DRAWING C3-5."

4. Drawing C4-P **Delete** callout reading "EMERGENCY GENERATOR WITH SUBBASE TANK, SEE NOTES 1 AND 2/DWG C3-P" in its entirety and **Add**

"EMERGENCY GENERATOR WITH SUBBASE TANK, SEE NOTE 4/DWG C3-P"

5. Drawing E3-P **Delete** callout on Bottom Plan reading "ELECTRICAL BUILDING FOUNDATION 0331607R" in its entirety and **Add**

"CONC FOUNDATION, SEE DWG S1-P"

6. Drawing E3-P **Add** callout to Bottom Plan

“CONC FOUNDATION NOT SHOWN IN ENTIRETY, SEE S1-P”

7. Drawing C4-C **Delete** callout reading “EMERGENCY GENERATOR W/ SUBBASE TANK, SEE NOTE 3 FFE: 679.00” in its entirety and **Add**

“EMERGENCY GENERATOR W/ SUBBASE TANK, SEE NOTE 1 FFE: 679.00”

8. Drawing C4-C **Delete** Note 1 in its entirety and **Add**

“1. CONTRACTOR SHALL COORDINATE EQUIPMENT PAD SIZES WITH THE PREFABRICATED BUILDING AND GENERATOR MANUFACTURERS. THE PADS SHALL BE MODIFIED AS REQUIRED FOR THE ACTUAL PREFABRICATED BUILDING AND GENERATOR PROVIDED, REFER TO STANDARD DETAIL 0331607R.”

9. Drawing C4-C **Add**

“Note 2. ½” EXPANSION JOINT MATERIAL AND SEALANT TO BE INSTALLED BETWEEN CONCRETE CURB AND PREMANUFACTURED BUILDING EQUIPMENT PAD.”

10. Drawing A1-C **Delete** callout on West Elevation reading “CONCRETE FOUNDATION WALL, SEE STRUCTURAL DWGS” in its entirety

11. Drawing A1-C **Delete** callout on West Elevation reading “CONCRETE SLAB, SEE STRUCTURAL DWGS” in its entirety and **Add**

“CONC EQUIPMENT PAD 0331607R”

12. Drawing A1-C **Delete** both callouts on Bottom Plan reading “EDGE OF FOUNDATION SLAB BELOW, SEE STRUCTURAL DWGS” in their entirety and **Add**

“CONC EQUIPMENT PAD 0331607R”

13. Drawing A1-C **Delete** callout on North Elevation reading “CONCRETE FOUNDATION WALL, SEE STRUCTURAL DWGS” in its entirety and **Add**

“CONC EQUIPMENT PAD 0331607R”

14. Drawing A1-C **Delete** note 4 in its entirety and **Add**

“CONTRACTOR SHALL COORDINATE CONCRETE EQUIPMENT PAD SIZE WITH THE MODULAR BUILDING MANUFACTURER, REFER TO STRUCTURAL GENERAL NOTES ON DRAWING S1 AND STANDARD DETAIL 0331607R.”